Simple and functional:
The simplicity at it's best – simple though reliable design, for easy access and maintaining of your equipment.

Description:
- Stable and strong structure
- Easy to fix and maintain.
- 19 inch standard installation, and adjustable rack depth.

Material: SPCC quality cold rolled steel.
Thickness:
Beams: 2mm
Plinth: 1.5mm
Others: 1.2mm

Static Loading Capacity:
200kg

Surface finish:
Decrease, pickling, phosphoric, rust prevention and parkerizing, pure water cleaning, static electricity painting

Size:
Height: 42U
Width (base): 550mm
Posible base Depth: 600mm, 800mm, 1000mm
MAX depth between frames: 525mm, 725, 925m

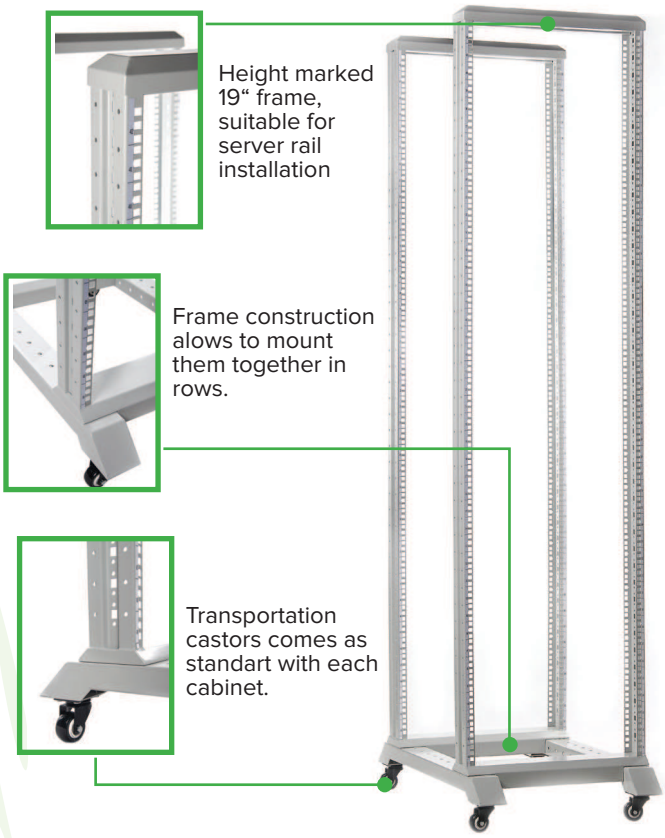

Specifications:

Standart Configuration
1. Main frame
2. Plinth
3. Horizontal beam
4. Castors

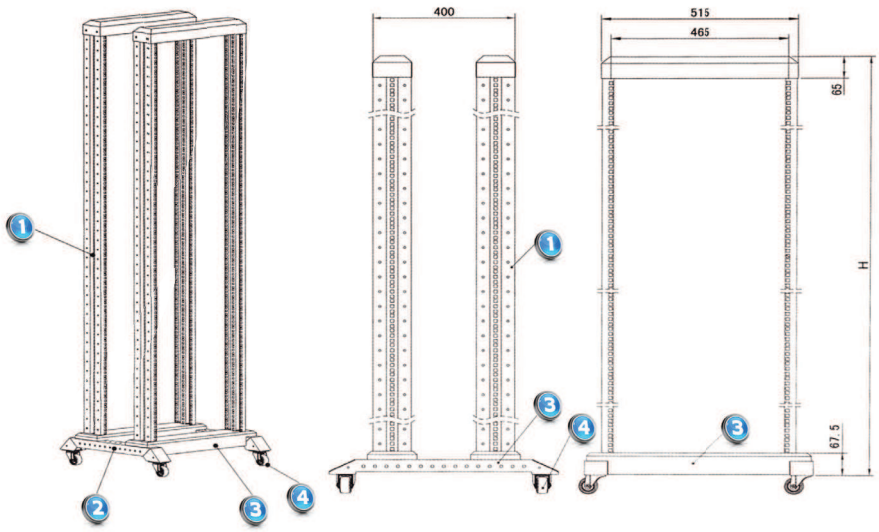

Remark: To achieve maximum stability of the frame, we highly recommend to mount at least one item of equipment with four point mounting (betwen front and rear frames). If you don't have it - simply mount 1U shelf in the top of the frame.

Ordering information:

Part Number*	Wide, mm	Depth, mm	Height, mm	Depth, mm (between frames)
42U-55/60	550	600	2050	525
42U-55/80		800	2050	725
42U-55/100		1000	2050	925