


## B-102B Fiber optic closure

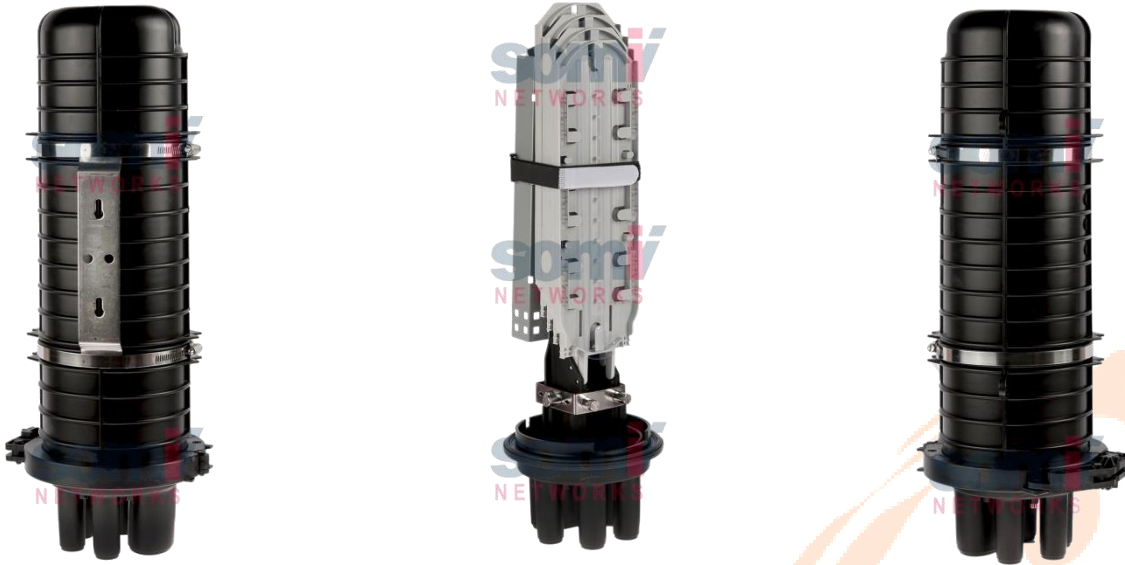

Vertical fiber optic closure suitable for up to 96 splices.

- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member termination system included.
- Ribbed closure construction-lightweight plastic offers strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- All hardware are captived
- The best degree of protection – IP68

### Sealing way

Base-to-base seals on the closures are mechanical for ease of installation and re-entry  
Cable seals by heat shrink tube

### Application

Watertight, Underground, Aerial, Vault and Wall Mountable

### Specifications

Model No	Height x Diameter	Spliced fiber storage capacity	Cable ports	Max. diameter of cable(mm)	Splice Trays	Splice Capacity of the tray
B-102B	540mm x 180mm	standard fiber, 96 cores(4 x 24 cores)	5 ports	1 port : for loop cable with max 25 mm.	Max .4 trays (24cores)	24 cores (stand fiber )
		Ribbon fiber,288 cores(4x 72 cores)		4 ports : each port for 1 cable with max 19 mm.		72 cores(ribbon fiber)