

One of the slimmest solutions for your equipment. 3u-54/18 cabinet is only 180mm depth, and is very popular for residential, small office and other environments, where limited space solutions are required.

Equipment is mounted vertically in 3U 19" frame and horizontally in 3U 19" frame, which height can be adjusted according to your equipment. Additional holder can be added upon request.

Standard

- * Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7,
- * GB/T3047.2-92 standard.

Feature

- * Reliable structure.
- * Wall mounting installation.
- * Easy mounting installation.
- * 19" standard vertical installation.
- * Cable entrances on both of top cover and bottom panel.
- * Opening angle of front door is in excess of 180 degrees.

Material

SPCC cold rolled steel;

Thickness: mounting profile 1.5mm, others 1.2mm.

Surface finish


Degreased, phosphoric and powder coated.

Degree of protection

IP20

Loading capacity

40kg

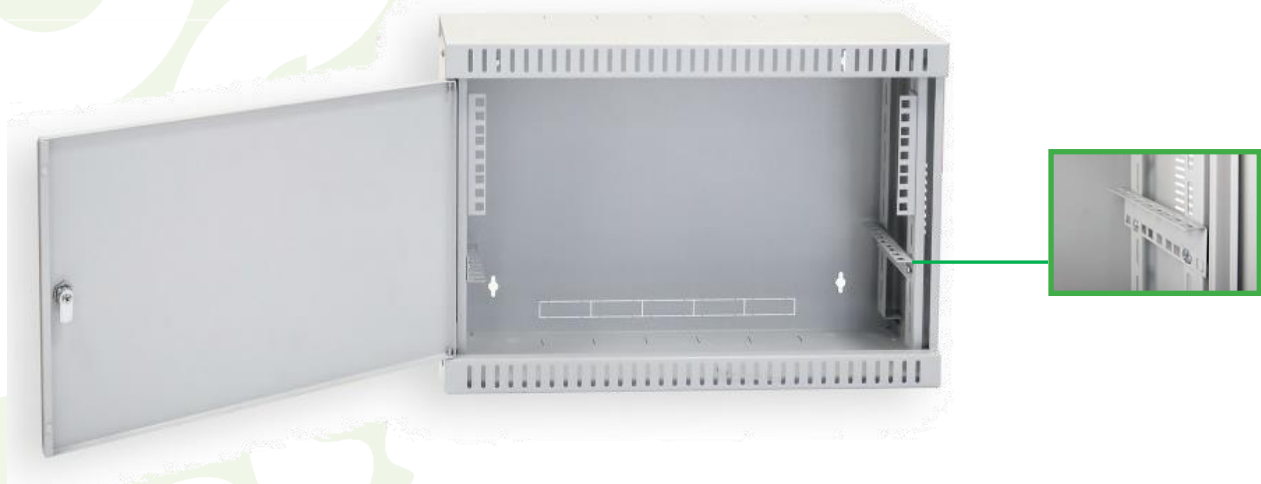

Ordering information:

Part Number	Height, mm	Wide, mm	Depth, mm	Door
3U-54/18SN	400	540	180	Steel
3U-54/18SNC	400	540	180	Glass