

Compact enclosure with a range of small depths, perfectly suitable for residential or small office installations. Simple, functional and robust design, for the safety of your equipment.

- Welded structure makes it very sturdy and robust
- Pre-assembled structure – makes installation easy and fast

Standard

- Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7,
- GB/T3047.2-92 standard

Feature

- Welded frame, reliable structure.
- Wall mounting installation.
- Easy mounting installation.
- 19" standard installation.
- Cable entrances on both of top cover and bottom panel.
- 120mm fan (optional).
- Opening angle of front door is in excess of 180 degrees.

Material

SPCC cold rolled steel;

Thickness: mounting profile 1.5mm, others 1.2mm.

Surface finish

Degreased, phosphoric and powdercoated

Degree of protection


IP20

Loading capacity

60kg



Mounting plate, for easy on wall installation.




Lockable front door.



Height marked 19" frame

Optional doors:

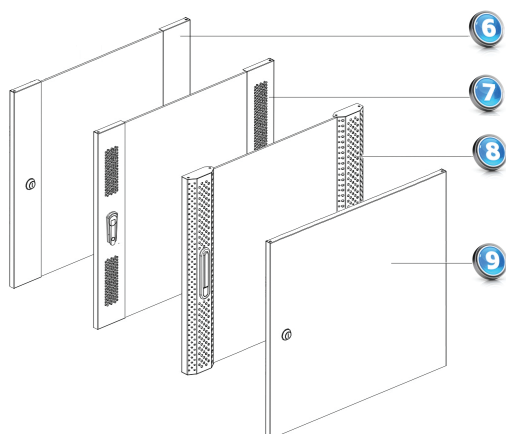

Standart cabinet ordering information:

Part Number	Height, mm	Wide, mm	Depth, mm
4U-60/40SN	280	600	400
4U-60/45SN	280		450
6U-60/15SN	368		150
6U-60/30SN	368		300
6U-60/40SN	368		400

* For steel front door (No.: 9 in the picture) add „ST“in the end of part number (example: 12U-60/60ST)

** Doors Nr.7 and Nr.8 are supplied on request