



CCAS-PA6-24STP-O-2

Panel cat.6 STP 24xRJ45 with shelf



Panel cat. 6 STP (shielded) is intended for the installation of cable ends coaxial in a 19" telecommunications cabinet. Perfect for installation in computer networks, CCTV systems, etc., exposed for electromagnetic interference. The panel meets the requirements of standards structured cabling: ISO / IEC 11801, EN 50173, TIA / EIA 568-C.2.

Product features:

- for indoor use
- equipped with a guide for easy fixing of cables
- port numbering
- compatible with LSA tools
- terminating 4 pairs, 22-26 AWG cable
- tested, measurement performed with cat.5e UTP cable at a distance of 90m using the Fluke Networks DSX-5000
- meets requirements of cat. 6 STP

Technical data:

- unshielded
- 24 x RJ45, 1U
- fits in to „keystone" panel or faceplates
- equipped with a cable guide
- fits in to „keystone" panel or faceplates
- color coded for T568A and T568B wiring schemes
- panel: SPCC, 1.5mm thickness, RAL 9005
- size: 482,6 x 44,5 x 100mm

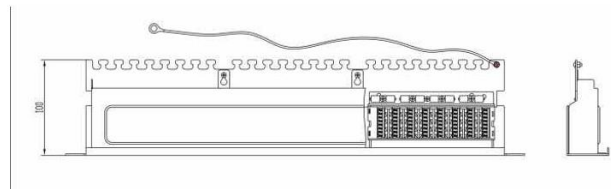

Ordering information

Code	Description	Packaging
CCAS-PA6-STP-O2	19" 1U Patch panel cat.6 STP 24port with shelf	1