

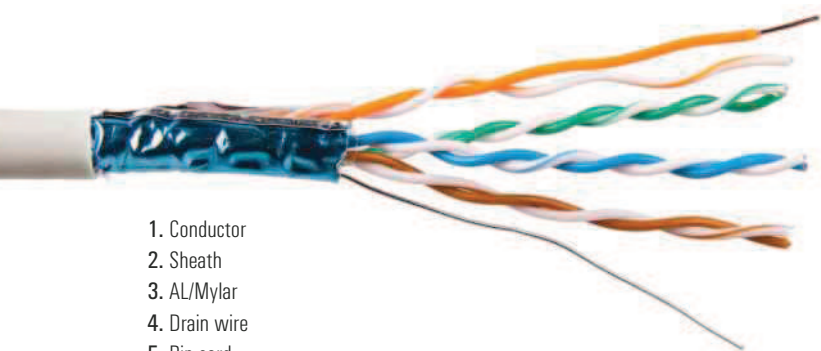


5e F/UTP LSZH

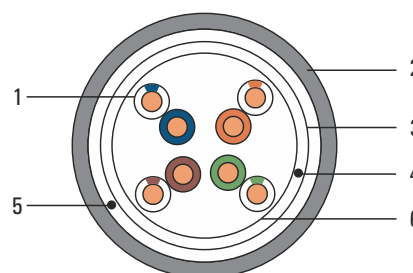

1. Conductor
2. Sheath
3. AL/Mylar
4. Drain wire
5. Rip-cord
6. Mylar

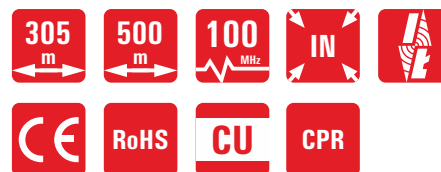

Cat. No.: SEC5EFTPLSZH

SecurityNET installation twisted cable is intended to connect between distribution point of multimedia signals and user's connectors. F/UTP twisted cable (shielded) is perfectly suited for installations in computer networks, phone networks, CCTV systems, etc., which may be exposed to electromagnetic disturbance. Screen application minimizes interference that may occur when the cables are put in the same pathway with other power cable. It has an outer coating of LSZH. The cable meets requirements of structured cabling: ISO / IEC 11801, EIA / TIA 568-C.2, EN50173.

- for indoor use
- high-quality of the workmanship (copper)
- tested (measurement performed on the distance of 90 meters with Fluke Networks DSX-5000 measure)
- meets requirements of cat. 5e F/UTP
- also available in versions: 5e U/UTP, 6 U/UTP, 6 F/UTP, 6A U/FTP, 7 S/FTP, 7A S/FTP

TECHNICAL DATA:

construction:	4x2	max. resistance 1-100 MHz:	9,5 (Ω/100m)
conductor core:	0,510 mm	operating temperature:	from -15°C to +60°C
execution core:	copper wire [Cu]	installation temperature:	from 0°C to +50°C
insulation core:	HDPE 1,02 mm	NVP:	68 %
screen:	aluminium foil	Delay Skew (ns/100m):	≤ 45
thickness:	0,55 mm	minimum bendig radius:	8 x diameter
nominal diameter:	6,3 mm LSZH	color:	RAL 7035
characteristic impedance 1-100 MHz:	100 Ω	CPR class:	Dca

Transmission frequency	1	4	8	10	16	20	25	31,3	62,5	100
NEXT ≥ dB/100 m	65,3	56,3	51,8	50,3	47,2	45,8	44,3	42,9	38,4	35,3
Attenuation ≤ dB/100 m	-	4,1	5,8	6,5	8,2	9,3	10,4	11,7	17,0	22,0
Return loss ≥ dB/100 m	20,0	23,0	24,5	25,0	25,0	25,0	24,3	23,6	21,5	20,1
PSNEXT ≥ dB/100 m	62,3	53,3	48,8	47,3	44,4	42,8	41,3	39,9	35,4	32,3
ACR-F ≥ dB/100 m	63,8	51,8	45,7	43,8	39,7	37,8	35,8	33,9	27,9	23,8
PS-ACR ≥ dB/100 m	60,8	48,8	42,7	40,8	36,7	34,8	32,8	30,9	24,9	20,8
Delay ≤ ns/100 m	570	552	547	545	543	542	541	540	539	538