
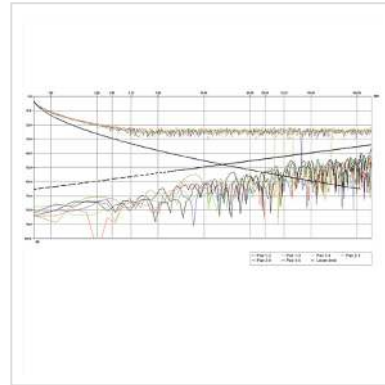


ROLINE FTP Cable Cat.5e (Class D), Stranded Wire, 300 m

| | |
|---------------------------|---------------|
| Product No. | 21.15.0121 |
| Manufacturer | ROLINE |
| Manufacturer No. | 21.15.0121 |
| EAN (single piece) | 7611990135905 |

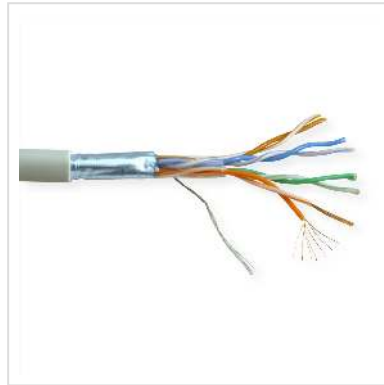

- Structured building wiring
- Impedance: 100 Ohm
- Colour: Grey
- Construction 21.15.0121: 8 lines, copper, stranded wire AWG26, screening: alu-laminated foil
- Diagram: attenuation/near end crosstalk

For a structured cabling system we recommend to use the following components:

- ROLINE Cat.5e FTP Cable, Solid Wire, AWG24: 21.15.0009 (100 m), 21.15.0010 (300 m)
- ROLINE Cat.5e Flush/Surface Mount Wall Jack, shielded: 25.16.8487 (white), 25.16.8486 (ivory)/25.16.8387 (white), 25.16.8386 (ivory)
- ROLINE Cat.5e 19" Patch Panel, 24 Ports, shielded: 26.11.0329 (light grey), 26.11.0328 (black)
- ROLINE Cat.5e FTP Patch Cord, grey, 5 m: 21.15.0105

Our in-house laboratory has tested this cable-plug combination, in a Channel of 100 meters, in compliance with Class D specifications.

Technical specifications

| | |
|---------------------------------------|--------------------|
| Manufacturer | ROLINE |
| Product group | Twisted Pair Cable |
| Product type | Raw cable Cat.5e |
| Colour | grey |
| Length | 300 m |
| Contents | 300 m |
| Shield type | FTP |
| Transfer quality | Cat5e / Class D |
| Impedance | 100 Ohm |
| Quantity of wires | 8 |
| Conductor cross section (AWG) | AWG 26 |
| Conductor type | Wire |
| Cable LSOH | No |
| Material (external cable mantle) | PVC |
| Weight | 9873.8 g |
| Height of packaging (single piece) | 300 mm |
| Width of packaging (single piece) | 440 mm |
| Depth of packaging (single piece) | 450 mm |
| Package weight (single piece) | 10.329 kg |