# FREESTANDING CABINETS 19", STANDARD SERIES

## Freestanding Cabinets 19", STANDARD series

#### Simple and functional:

STANDARD series is a simple design cabinets with heights from 15U to 47U, and depths from 60cm to 100cm.

#### The higher standard:

Glass front door, two pairs of vertical frames, castor and height ajustable leg sets are suplied in the basic configuration of this cabinet, so you won't have to worry about the details.

#### Flat pack version available:

You can choose a flat pack version of it, to higher your savings on transportation costs.



Perforated roof panel, for ventilation of the cabinet.



Removable and lockable side panels, for easy and secure access.



Height marked 19" frame



Transportation castors comes as standart with each cabinet.

#### **Description:**

- Easy to adjust the depth of 19" frames
- Front door with 5mm smoky grey toughened glass
- · Removable front/rear door and side panels, easy to install and maintain.
- · Optional cooling fan units.
- Cable entry ports on the top and bottom.
- Castors and height adjustable legs included in standart configuration.
- Compatible with 19" standard equipment.

Material: SPCC quality cold rolled steel.

IP rating: 20

Thickness: Mounting profile: 2.0mm (3.0mm available on request) Others: 1.2mm

Surface finish: Decrease, Pickling, Phosphating, Rust prevention,

Pure water cleaning, Static electricity painting Width: 600, 800mm Depth: 600, 800, 1000mm

Height: 15U, 18U, 20U, 22U, 27U, 32U, 37U, 42U, 47U.


Static Loading Capacity (balanced load): 800kg





# **Standard Configuration**

- 1. Top panel with cable entry
- 2. Bottom panel with cable entries
- 3. Fan unit (optional)
- 4. Main frame
- 5. Glass front door
- 6. Rear panel/door with small lock
- 7. Side panel
- 8. Horizontal supports
- 9. Two pairs of 19" rails
- 10. Castors
- 11. Height adjustable legs

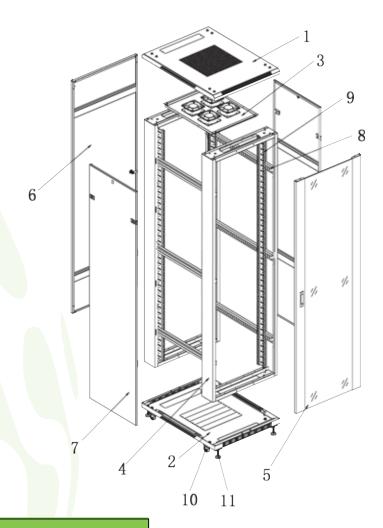

#### **Optional front doors**

Perforated steel door with swivel handle (perforation rate 65%)

Two part perforated steel door with swivel handle (perforation rate 65%)

Plain steel door with swivel handle

#### **Optional rear doors**

Plain steel door with swivel handle

Perforated steel door with swivel handle (perforation rate 65%)

### **Optional accessories**

Fan units

Vertical cable managers (for 800mm wide cabinets)

Plinth

Grounding units

#### **Colors available:**

RAL7035 Grey (Standard)

RAL9004 Black (on request)








# FREESTANDING CABINETS 19", STANDARD SERIES

**Door options:** 









Glass Door

Plain steel door

Perforated door

Two part perforated door


# Standard cabinet ordering information:

Part Number*	Width, mm	Depth, mm	Height, mm**
15U-60/60NAC	600	600	859
15U-60/80NAC	600	800	859
20U-60/60NAC	600	600	1081
22U-60/60NAC	600	600	1169
22U-60/80NAC	600	800	1169
22U-60/100NAC	600	1000	1169
27U-60/60NAC	600	600	1426
27U-60/80NAC	600	800	1426
32U-60/60NAC	600	600	1616
32U-60/80NAC	600	800	1616
32U-60/100NAC	600	1000	1616
32U-80/80NAC	800	800	1616
32U-80/100NAC	800	1000	1616
37U-60/60NAC	600	600	1836
37U-60/80NAC	600	800	1836
42U-60/60NAC	600	600	2059
42U-60/80NAC	600	800	2059
42U-60/100NAC	600	1000	2059
42U-80/80NAC	800	800	2059
42U-80/100NAC	800	1000	2059
45U-60/60NAC	600	600	2188



<sup>\*\*</sup> Height adjustable legs allows to reduce cabinet height by 30mm (if castors are removed)



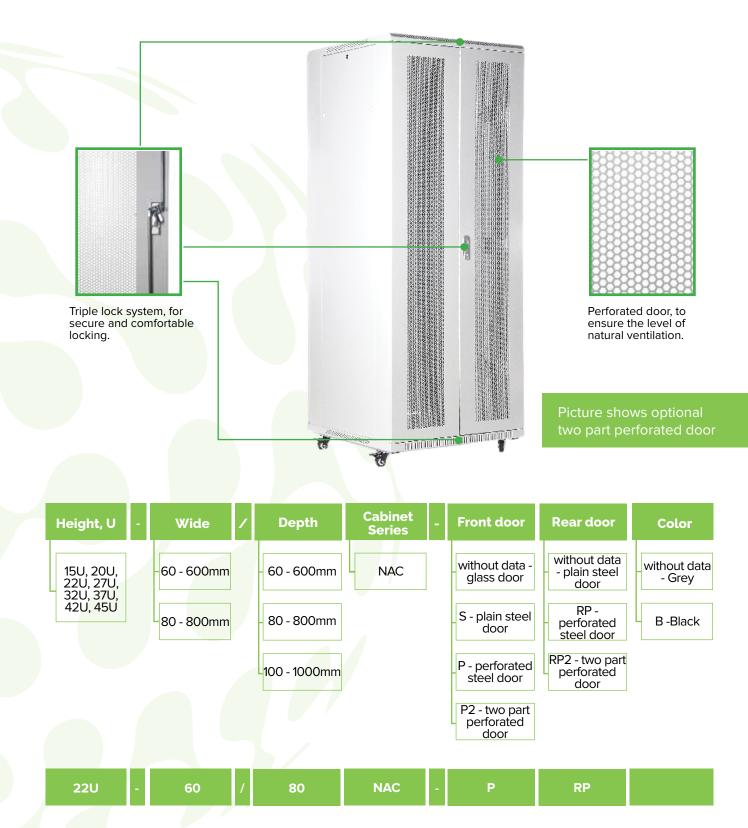

**Explanation:** With the part number 22U-60/80NAC-PRP you would get 22U cabinet, 600mm wide, 800mm depth, with front perforated door, and rear perforated door, grey color.

#### Have special requirements for your projects? We can help here!

If you need any specific design change, or some modifications according to your projects, feel free to ask us. Our production line provides possibilities to make custom solutions according your requirements.

Remark: The cabinets have a disassembled construction and can be ordered either assembled or unassembled

