

DIN RAIL FIBER OPTIC DISTRIBUTION BOX



TB-DIN-06

Fiber optic box with 6 SC duplex, or LC quad ports up to 24 fibers. Mountable on DIN rail in electric, automation, communication cabinets, or other environments, where it is possible to mount a DIN rail.

It is suitable for connecting SC duplex or LC quadplex adapters.

Installation on DIN rail, indoor use.

Suitable for termination of fiber optic cables up to 24 fibers.

Optical adapters and splice protectors are not included.


SPECIFICATIONS:

Dimensions	115 x 113 x 61mm
Material	cold rolled steel
Installation type	DIN rail
Splice capacity	12 pcs (crimp splice protector)
Splice protectors	Not included (recommending 45mm)
Color	Light gray
Maximum ports of SC duplex or LC quadplex adapters	6 pcs (not included)
Cable entries	1x top, 1x bottom for M20
Temperature range	-40°C~+85°C
Weight Net.	480 gr.

ORDERING INFORMATION:

PART NUMBER	DESCRIPTION	UNIT
TB-DIN-06	DIN mount box 6xSC duplex 115x113x61mm, steel	pcs

DRAWING:

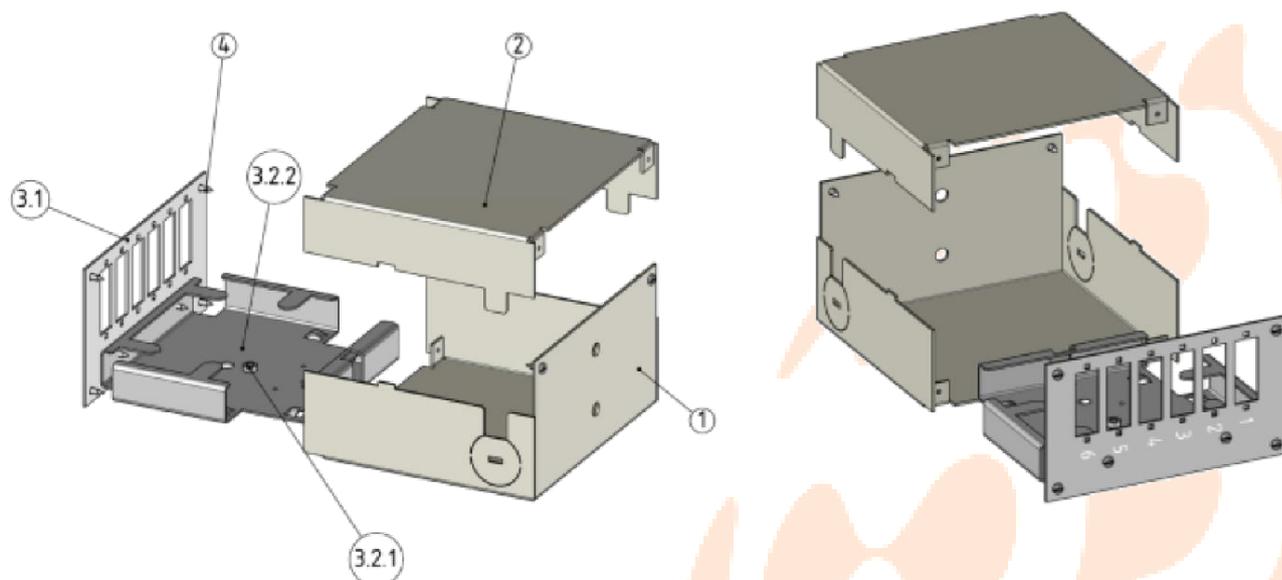

Nr.	Description	Quantity
1	Housing, part 1	1
2	Housing, part 2	1
3.1	Frint plate 6port SC duplex	1
3.2.1	Rivet	1
3.2.2	Mounting plate (97 x 90,3 x 15,5mm)	1
4	Front plate tapping screws	4