

TB-6201Z Fiber optic termination box


TB-6201Z box is used as a termination point for the drop cable to connect with ONU internal of apartment in FTTx communication network system. The fiber splicing can be done in this box, and meanwhile it provides solid protection and management for the FTTx network building. Box comes with 2pcs heat shrink sleeves and mounting screws.



Mechanical specifications:

Item	Specifications
External dimension(mm)	150*50*15
Material	PC+ABS
Color	RAL9016
Fiber cable diameter of the output port(mm)	Φ0.9 mm
Adaptor type of the output port(mm)	SC
Fusion capacity	2 cores
Flammability	UL94-V0
Heat-shrinkable protection sleeve	L=40mm
Service life (Year)	20
Operation temperature	-40 °C~+65 °C
Installation temperature	-15 °C~+50 °C
Storage temperature	-45 °C~+65 °C

Drawings:

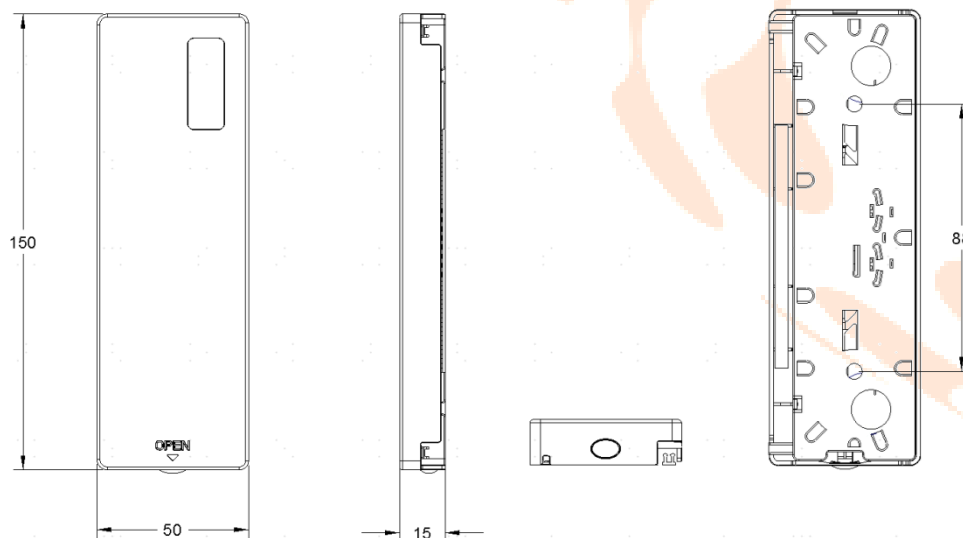

Pictures:

