

STANDART FP WALL SERIES CABINETS

The most popular design with superior quality, functionality and competitive pricing made this model a hot seller. Designed for professional use, but also used in residential areas, offices, or other applications.

- Very sturdy and robust structure
- Disassembled structure perfect for transportation if ordered flat pack
- Removable and lockable side panels offers extra protection for your hardware

Standard

- Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7,
- GB/T3047.2-92 standard.

Feature

- Reliable dismantable structure.
- Wall mounting installation.
- Easy mounting installation (patent).
- 19" standard installation.
- Removable side panels, and side locks in standart config
- Cable entrances on both of top cover and bottom panel.
- 120mm fan (optional).
- Opening angle of front door is in excess of 180 degrees.
- Delivered disassembled or assemble

Material

SPCC cold rolled steel;

Thickness: mounting profile 1.5mm,
others 1.2mm.

Surface finish

Degreased, phosphoric and powdercoated.

Degree of protection

IP20

Loading capacity


60kg



Removable and lockable side panels, for easy and secure access.



Lockable front door.




Mounting plate, for easy on wall instalation.




Description
1. Roof
2. Bottom
3. Front frame
4. Glass door
5. Side panels
6. Horizontal support
7. Support for equipment
8. Back panel
9. Mounting profile
10. 19" rails

Exploded view:

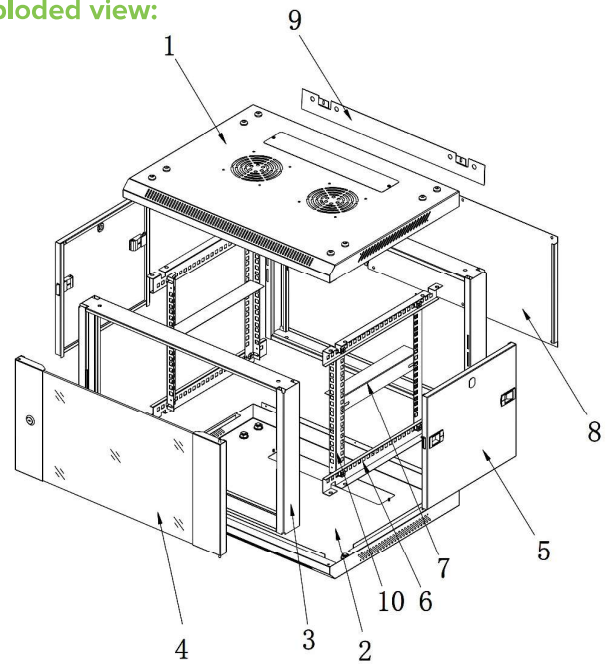

Drawings:

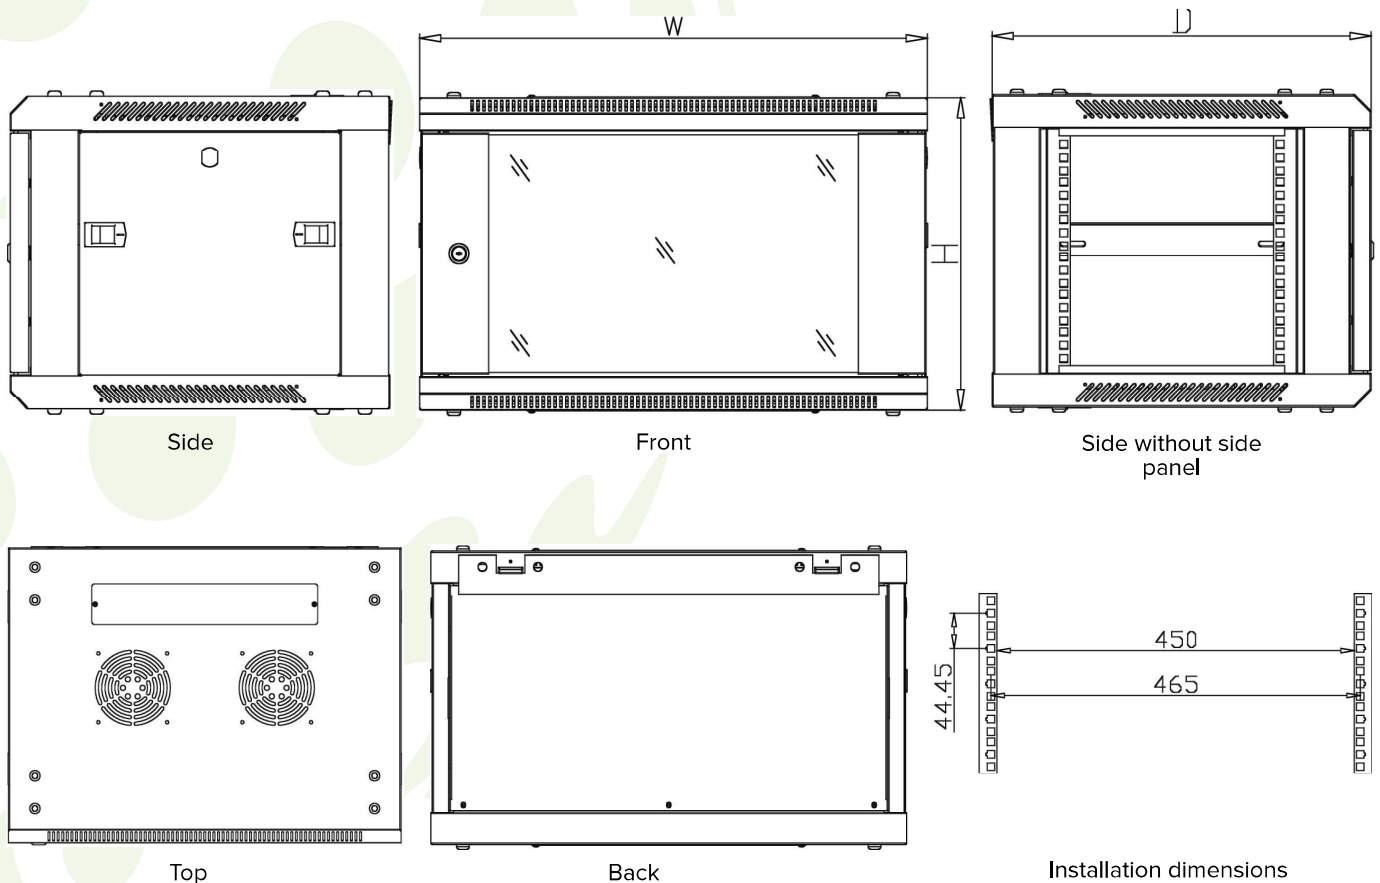

STANDART FP WALL SERIES CABINETS

Standart cabinet ordering information:

Part Number	Height, mm	Wide, mm	Depth, mm
4U-60/40	281	600	400
4U-60/45	281		450
6U-60/30	370		300
6U-60/40	370		400
6U-60/45	370		450
6U-60/60	370		600
9U-60/45	503		450
9U-60/60	503		600
12U-60/45	637		450
12U-60/60	637		600
15U-60/45	770		450
15U-60/60	770		600
15U-60/80	770		800
18U-60/45	906		450
18U-60/60	906		600
22U-60/45	1081		450
22U-60/60	1081		600
27U-60/45	1300		450
27U-60/60	1300		600


Height, U	-	Wide	/	Depth	Cabinet type	-	Front door
4U, 6U, 9U, 12U, 15U, 18U, 22U, 27U		60 - 600mm		45 - 450mm	without data - assembled		without data - glass door
				60 - 600mm	FP - Flat packed		S - plain steel door
				80 - 800mm			
15U	-	60	/	80		-	

Examples: With the part number 15U-60/80 you would get 15U cabinet, 600mm wide, 800mm depth, already aligned with glass front door.

Have special requirements for your projects? We can help here!

If you need any specific design change, or some modifications according to your projects, feel free to ask us. Our production line provides possibilities to make custom solutions according your requirements.

Flat packed packaging:

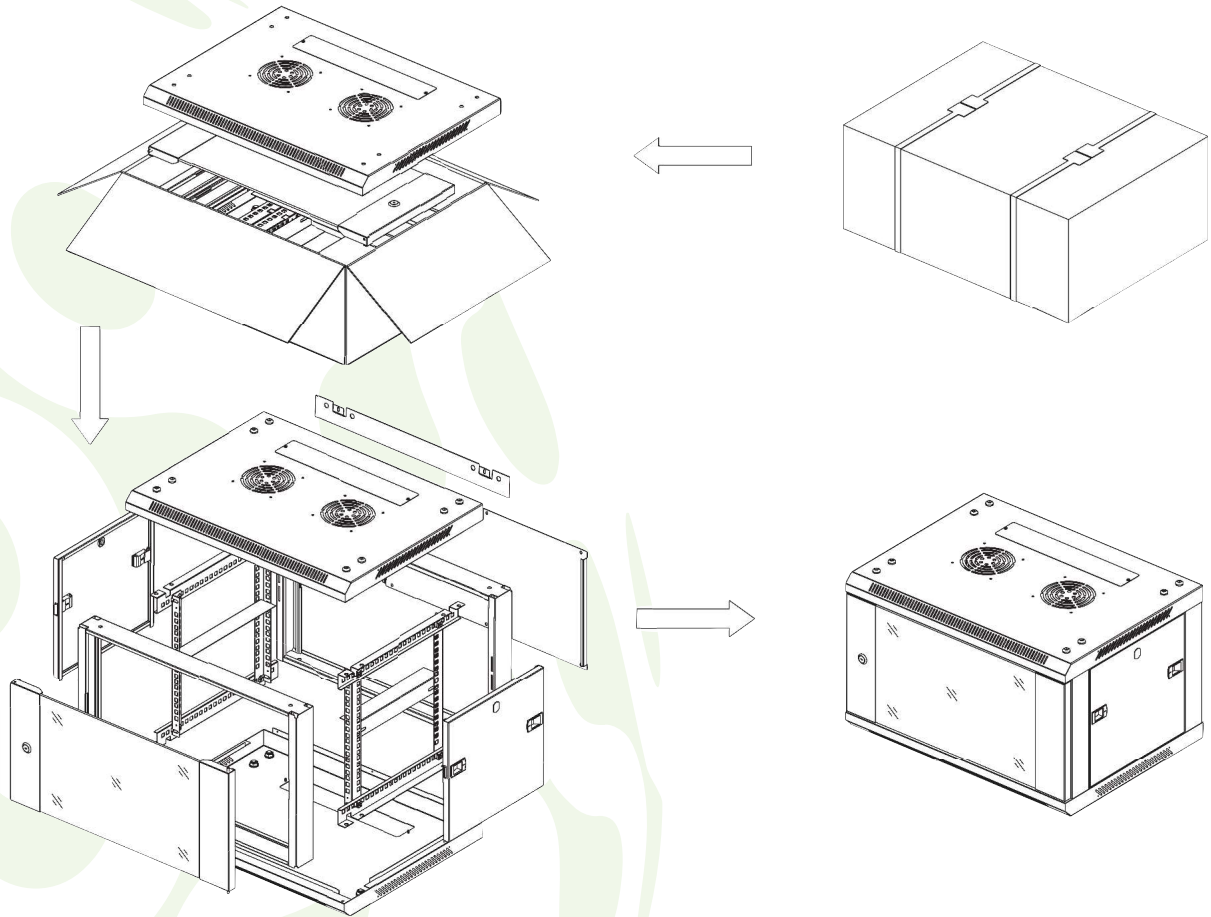

Standart color:

GREY (RAL 7035)

Optional color:

BLACK (RAL 9005)