

- ✗ Cat6 external grade cable for external use
- ✗ No conductor screening
- ✗ Outer sheath colour black
- ✗ Reaction-to-fire class according to EN 13501-6: Fca
- ✗ 23 AWG size conductors
- ✗ UV Exposure tested in accordance with ASTM G154 & G155
- ✗ CIBSE TM65 Embodied Carbon: 106.242 kg CO2e

Product Overview

Excel Cat6 ethernet cable U/UTP PE external grade Fca manufactured and tested to the TIA/EIA 568-B.2-1, EN50173-1 and ISO/ IEC 11801 Cat6 specifications, sold in 500 m reels. Each cable consists of 8 colour coded solid copper conductors twisted together to form four pairs.


These are then formed around a central X-shaped polyethylene centre with the whole cable produced in a PE sheath.

Product Specifications

Feature	Values
Conductor surface	Bare
AWG size	23
Conductor category	Class 1 = solid
Total number of cores	8
Stranding element	Pairs
Specification core insulation	Polyethylene (PE)
Core identification	Colour

Overall screening	None
Conductor screening	None
Outer sheath material	PE
Outer sheath colour	Black
Flame retardant according to IEC 60332-1-2	yes
Reaction-to-fire class according to EN 13501-6	Fca
Outer diameter approx.	6.3 mm
Operating Temperature Range	-10...75 °C
Category	6
NVP value	69 %

Cross-section diagram

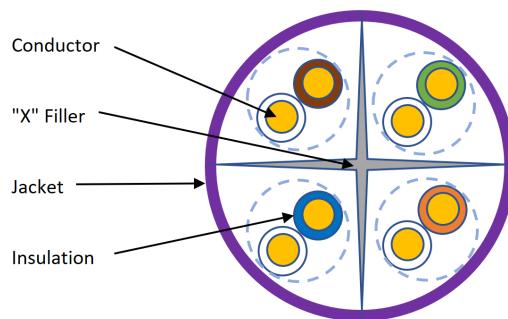

Cable specifications

Features	Values
Dielectric strength	2.5 kV for 2 s
Maximum pulling load	100 N
MBR during installation	8x cable OD
MBR installed	4x cable OD

Standards

Applicable standard	Subject
ISO/IEC 11801-1:2017	Information technology - Generic cabling for customer premises: Part 1 General Requirements
IEC 61156-5:2020	Multicore and symmetrical pair/quad cables for digital communications - Part 5: Symmetrical pair/quad cables with transmission characteristics up to 1 000 MHz - Horizontal floor wiring - Sectional specification
EN 50173-1:2018	Information technology. Generic cabling systems - General requirements
EN 50173-2:2018	Information technology. Generic cabling systems - Office premises
BS EN 50288-3-1:2013	Multi-element metallic cables used in analogue and digital communication and control. Sectional specification for unscreened cables characterised up to 250 MHz
EN 50399:2011+A1:2016	Common test methods for cables under fire conditions. Heat release and smoke production measurement on cables during flame spread test. Test apparatus, procedures, results
IEC 60332-1-2:2004 + A12:2020	Tests on electric and optical fibre cables under fire conditions. Test for vertical flame propagation for a single insulated wire or cable. Procedure for 1 kW pre-mixed flame
ANSI/TIA 568-D:2015	Balanced Twisted-Pair Telecommunications Cabling and Components Standards
IEC 60754-2:2014	Test on gases evolved during combustion of materials from cables - Part 2: Determination of acidity (by pH measurement) and conductivity
IEC 61034-2:2005+A2:2020	Measurement of smoke density of cables burning under defined conditions – Part 2: Test procedure and requirements
EN 50575:2014 + A1:2016	Power, control and communication cables — Cables for general applications in construction works subject to reaction to fire requirements
RoHS-II/-III (2011/65/EU & 2015/863): 2023	Our products, demonstrate full adherence to the regulatory stipulations of the EU Directive 2011/65/EU (RoHS-II) and its corresponding delegated directive 2015/863 (RoHS-III).
WFD: 2023	Compliant to Waste Framework Directive
SCIP: 2023	Compliant - Does Not Contain Substances of Concern In articles as such or in complex objects (Products)
POPs (EU) No 2019/1021	EU Regulation for the restriction of Persistent Organic Pollutants.

Excel Solid Cat6 Cable U/UTP PE External Grade Fca
500 m Reel Black

Item Code: 100-100-500



Part Number Table

Part Number	Description
100-100	Excel Solid Cat6 Cable U/UTP PE External Grade Fca 305 m Box Black
100-100-500	Excel Solid Cat6 Cable U/UTP PE External Grade Fca 500 m Reel Black

Excel is a world class premium performing end to end infrastructure solution designed, Manufactured, supported and delivered without compromise.

Contact us at sales@excel-networking.com

E&OE. Excel is a registered trade name of Mayflex Holdings Ltd.

